



# Specifications of U-2D Micro-Sample Management System - Tech Information

*Date: 4-August-2022 Last Updated: 18-JUNE-2025*


The U-2D™ Micro-Sample Management System is designed to match the standard ANSI/SLAS 96-well plate footprint, making it easy to integrate into existing lab equipment such as autosamplers, centrifuges, and robotic systems.

Below are the dimension drawings for the three available insert volumes:


---

## **350 µL & 500 µL Glass Inserts for the U-2D Systems**

These two formats share the same external dimensions and are ideal for low-volume workflows where sample conservation is critical.


 Click [HERE](#) to download the 350 µL & 500 µL system drawings (PDF)

**!350ul & 500ul dimension drawing for U-2D system**

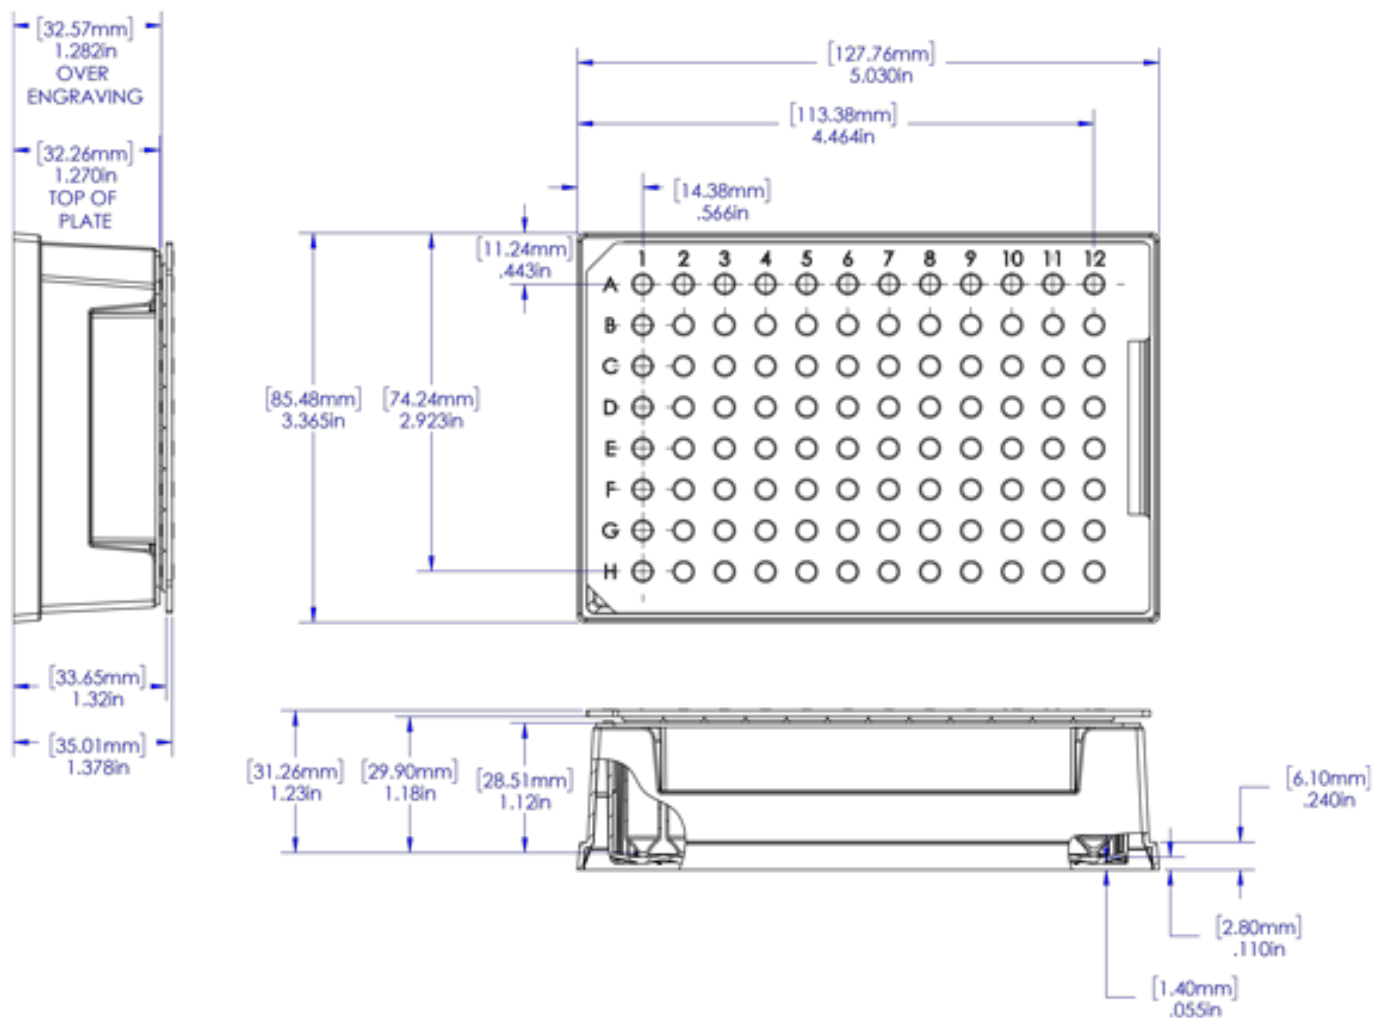


### 1,000 µL Glass Insert for the U-2D System

This format offers higher capacity while maintaining compatibility with ANSI 96-well plate standards.

 Click [HERE](#) to download the 1,000 µL system drawings (PDF)

**!1,000ul dimension drawing for U-2D system**

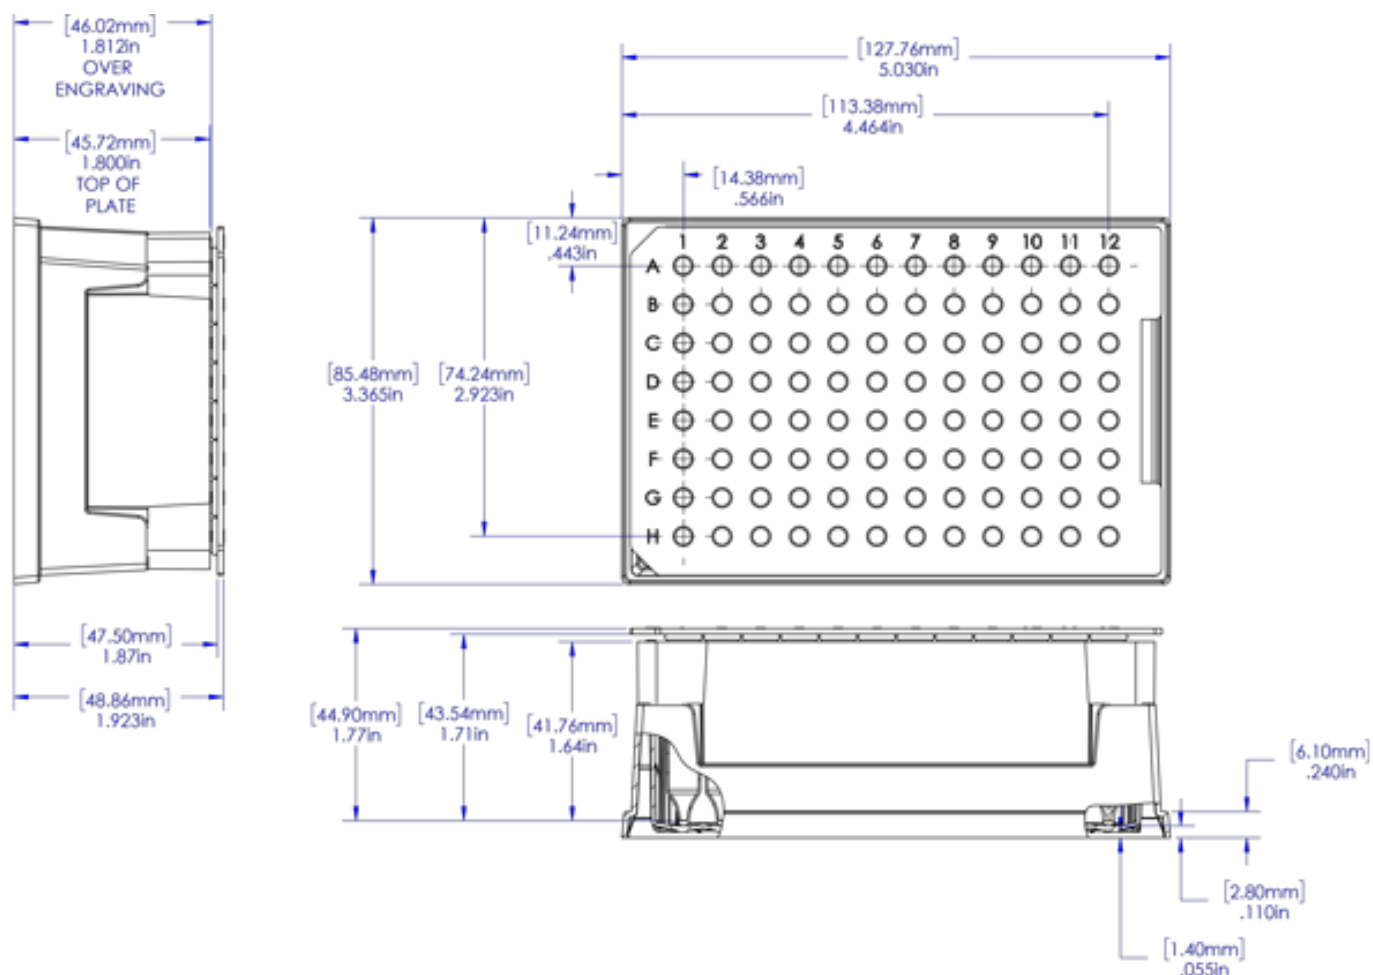

### ✓ Why This Matters for Low-Volume Chemists

- Compatible with standard lab automation – no need for custom adapters or trays.
- Consistent footprint across volumes – simplifies method development and scaling.
- Ideal for micro-sample storage, prep, and transfer – especially in LC/MS workflows.
- Excellent to manage a range of sample volumes from 2 ul to 1000 ul.

Printed from the Chrom Resource Center

Copyright 2025, All Rights Apply

**MicroSolv Technology Corporation**

9158 Industrial Blvd. NE, Leland, NC 28451

Tel: (732) 380-8900

Fax: (910) 769-9435

Email: [customers@mtc-usa.com](mailto:customers@mtc-usa.com)

Website: [www.mtc-usa.com](http://www.mtc-usa.com)