


Catalog Number

49590-02

Tubing Connector Nuts, high pressure, 1/16 inch, Stainless Steel hex head, short length with 10-32 screw threads. Ferrules sold separately. ARE-Applied Research brand. 10/PK.

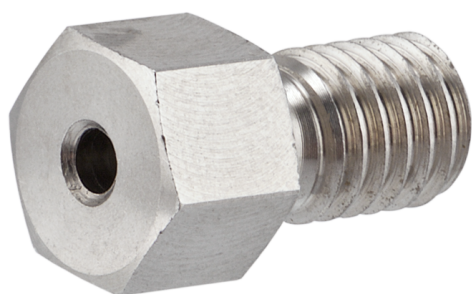

Pack of 10

Additional Info

These tubing connector nuts used to connect stainless steel tubing in the high pressures zones of HPLC systems.

This 316L stainless steel fitting has a standard diameter hexagonal head for wrenching the nut.

The short thread length makes this nut ideal for use on injectors such as the Rheodyne™ and others, where space is limited.

Use with single cone stainless steel ferrules which are designed to work with this fitting, providing a permanent attachment to SS tubing for a high pressure connection.

Click [HERE](#) for Ordering information for replacement Ferrules.

Click [HERE](#) for single unit quantity

MicroSolv Technology Corporation

9158 Industrial Blvd. NE, Leland, NC 28451

tel. (732) 380-8900, fax (910) 769-9435

Email: customers@mtc-usa.com

Website: www.mtc-usa.com

Price

\$77.04

Printed On 2024/05/20